

Pura Fresh+

Premium Water, Smart Design



Great Tasting Water on Demand.

Pura Fresh+ filters water right at the source, delivering fresh, great-tasting water every time you turn on the tap. With no bulky storage tank under your sink, it saves space while providing continuous, high-quality water for your everyday needs. It delivers more with less – purifying twice as much water as it sends down the drain. All the clean water you need, without taking up space.

High-Efficiency Design

Delivers continuously filtered water on demand using a high-capacity membrane that purifies twice as much water as it sends to drain – so you get better water with less waste.

Quiet Performance with Added Protection

The system runs whisper-quiet in the background and includes a built-in leak alarm with automatic shut-off for extra peace of mind.

Simple to Maintain

Changing filters is fast, clean, and easy with quick-change cartridges—just twist out the old and twist in the new. A built-in light reminds you when it's time for a replacement, so you'll never have to guess.



- ✓ **Fresh, Clean Taste** – No more unwanted flavor or smell
- ✓ **Great for Pets and Plants** – Fresh water for the whole family
- ✓ **Simple and Convenient** – Bottled-quality water, no extra cost or hassle

Distributed by:



Pura Fresh+

Product Specifications

FEED WATER GUIDELINES	
Maximum TDS	2,500 ppm/mg/l
Feed Water Pressure	30 to 70 psi (96-399 kPa)
Maximum Hardness	7 GPG
Maximum Iron	0.2 ppm/mg/l
Maximum Manganese	0.05 ppm/mg/l
Maximum Hydrogen Sulphide (H ₂ S)	0.00 ppm/mg/l
Maximum Turbidity	1.0 NTU
Temperature Range	40° to 100° F (4° to 38° C)
pH Range	3.0 to 11.0
Maximum Chlorine	2.0 ppm/mg/l
Maximum Chloramine	2.0 ppm/mg/l

NOTE: Feed water supply must be potable

Model: Pura Fresh+ Item# 19050010		
Water Supply		Potable Water
Feed Line Pressure		30 - 70 psi (96-399 kPa)
Flow Rate		0.62 gal/min (2.3 L/min)
Salt Rejection		≥93.6%
Recovery		65%
Feed Water Temperature		4-38 °C
Ambient Humidity		≤90%
Sound Level		≤60dB
Electrical	Input	100-240V AC 50/60Hz
	Output	DC24V 5A
	Power Used	120W
Membrane	Type	Thin Film Composite Membrane
	Rating	800 G
Connection	Faucet	3/8" Quick Connect
	Inlet	3/8" Quick Connect
	Drain	1/4" Quick Connect
Accessory		Faucet & Installation Kit Included
Product Dimension (WxDxH)		5.1*15.6*14.8 in
Carton Dimensions (WxDxH)		14.1*18.8*17.3 in

*Salt rejection and water recovery are variable and can be affected by temperature and feed water conditions.

For residential use only.

Features:

Faucet Included

- ✓ Chrome faucet with swing spout

Easy Installation

- ✓ Supply valve included - no pipe cutting or soldering required

Electric power hook-up


Quick Connect Fittings

- ✓ Connect tubing to filter in seconds

RO Water Faucet Connection

Drain Water Connection

Feed Water Connection

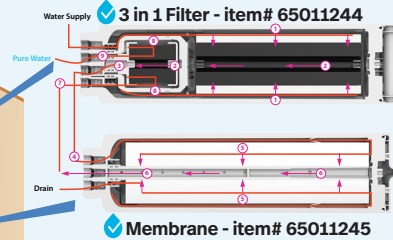

Additional Features:

- ✓ Simplicity of Installation - tankless
- ✓ Continuous filtered water flow on demand
- ✓ Space saving design
- ✓ Disposable filter cartridges
- ✓ No storage tank
- ✓ Intelligent filter service life reminder
- ✓ Integrated manifold design
- ✓ High-efficiency technology saves water (2 Purified : 1 Drain)
- ✓ Designed for whisper quiet performance
- ✓ Leak detector with automatic shut off and audible alarm



"Pura provided excellent service without any upselling, completed the job quickly, and left me completely satisfied. Highly recommend them for anyone looking for a hassle-free experience!"

Warranty



RO SYSTEM

PuraTM
Water Refined.

DESIGNED, ENGINEERED & ASSEMBLED IN NORTH AMERICA

A Division of



Distributed by:

Blue Wolf Concepts
465 N Cedar Road
Mason, MI 48854
517.992.5065

